




ERGONOMIC PRODUCTS
 Email: info@jenalex.ca
 Web: www.jenalex.ca

"Give your staff a lift"

3266 Yonge Street, # 1711
 Toronto, ON M4N 3P6
 Fx: 416-485-7417
 Ph: 416-485-9487
 Ph: 800-JENALEX (536-2539)

Rev. 10/06

The Ergomat Complete Smooth is made of pure polyurethane and is designed to increase comfort while reducing tripping hazards, body aches, quality issues, and sick leaves. This is the **ULTIMATE** mat for areas combining sitting and standing or where static electricity control is a must.

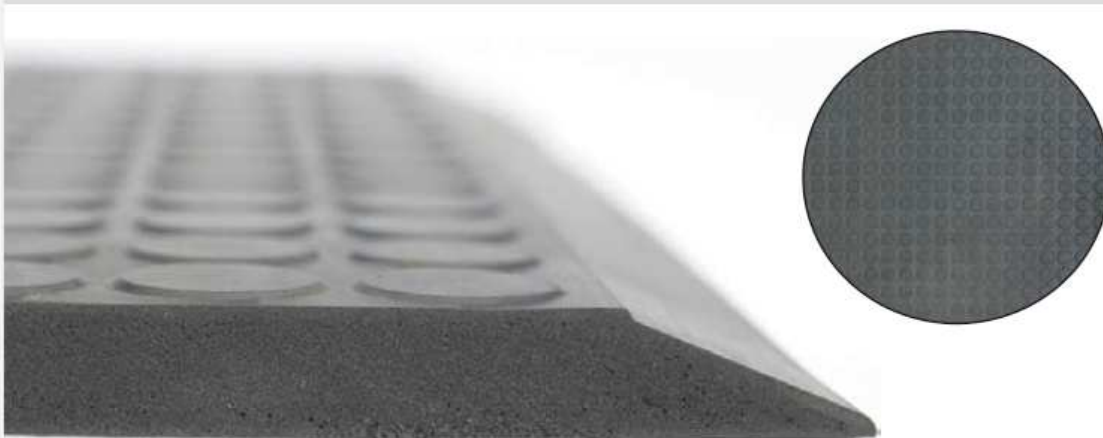

Unmatched Safety Features

- Molded beveled edges
 - They will never curl up, eliminating tripping hazards
- Any size, any shape, always in one piece
 - No overlapping or worn out connecting mats, also eliminating tripping hazards

Highest Quality

- Raw virgin material only
 - Unbeaten durability
 - Lifetime ergonomic benefits

The Complete Smooth Advantage

- Solid mat throughout
- Fire retardant
- Resists oils and liquids in moderation
- Anti-static properties
- Silicone & latex-free

5-Year Warranty

All Ergomat product lines are conditionally warranted against normal usage* 24 hours a day, 7 days a week. The warranty does not cover damage caused by the mat being dragged or pulled from a heavy load or items being pushed or dragged across the product, such as skids or pallets. The warranty against chemicals, oils, liquids, or other matter differs with the type of mat. Please consult your dealer or an Ergomat Rep to select the correct mat for your environment. The warranty periods starts from the date of purchase.

*It is considered normal usage when a person stands or walks on the Ergomat with regular footwear.

ERGOMAT Complete Smooth



ERGONOMIC PRODUCTS
 Email: info@jenalex.ca
 Web: www.jenalex.ca

"Give your staff a lift"

3266 Yonge Street, # 1711
 Toronto, ON M4N 3P6
 Fax: 416-485-7417
 Ph: 416-485-9487
 Ph: 800-JENALEX (536-2539)

Properties	Norm	ERGOMAT Complete Smooth
Material		Foamed polyurethane smooth surface
Color		Anthracite
Weight		2200 g +/- 50 g // 4.5 lbs +/- 0.1lbs
Length without beveled edges		90,0 cm +/- 1% // 35.5" +/- 3/8"
Width without beveled edges		60,0 cm +/- 1% // 23.5" +/- 3/8"
Thickness		11 mm // 7/16"
Density	DIN 53 479 A	390 kg/m ³ +/- 10 %
Hardness	DIN 53 505	20-30 Sh A
Compression Pressure face = ø 100 mm % by pressure of 240 kg	Tinby A/S standard	50%
Abrasion Load = 5 N	DIN 53 516 / ISO 46 49	540 mm ³ // 21 in ³
Breaking point / tensile strength	EN ISO 527-1	1.3 Mpa
Elongation at break	EN ISO 527-1	230%
Tearing strength	ASTM D 624	2.5 N/mm
Electrical resistance Surface point to point % 50 RH	ANSI/ESD -S7.1-1994 And conforms to DS/EN 100015-1	1 x 10 ⁸ Ω - 5 x 10 ⁹ Ω
Fire behavior	DIN 4102-B1 Part 14/ DIN EN 13 501-1	B1 / CfI-sI
Thermal properties min. use max. use max. short duration	The ergonomic properties remain	0°C // 32°F 80°C // 176°F 120°C // 248°F
UV-resistance		Inferior
Hydrolytic resistance		Good
Clean room application	EN ISO 14644-1	Class 100 (ISO Class 5)
Warranty		5 years